

**PDC-12140** 12 Volt 13.9 AH @ 20-hr. rate  
13.0 AH @ 10-hr. rate

Rechargeable Sealed Lead Acid Battery  
PDC SERIES AGM DEEP CYCLE




## Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Oversize negative plates and a specialized paste formulation provide true deep cycle performance.
- Special additives in the paste ensure superior performance in deep discharge situations.
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845


## Terminals

(mm)

- F2 - Quick disconnect tabs, 0.250" x 0.032"
- Mate with AMP. INC FASTON "250" series



## Physical Dimensions: in (mm)

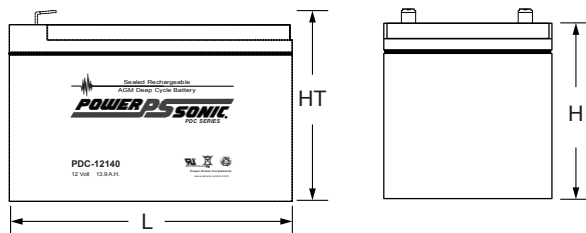

L: 5.95 (151) W: 3.86 (98) H: 3.74 (95) HT: 3.98 (101)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

## Performance Specifications

**Nominal Voltage** ..... 12 volts (6 cells)

### Nominal Capacity

20-hr. (695mA to 10.50 volts).....	13.90 AH
10-hr. (1.3A to 10.50 volts) .....	13.00 AH
8-hr. (1.59A to 10.50 volts).....	12.72 AH
5-hr. (2.28A to 10.20 volts).....	11.40 AH
1-hr. (8.40A to 9.00 volts) .....	8.40 AH
15-min. (25.7A to 9.00 volts).....	6.43 AH

**Approximate Weight** ..... 9.26 lbs. (4.20 kg)

**Energy Density** (20-hr. rate) ..... 1.82 W-h/in<sup>3</sup> (110.83 W-h/l)

**Specific Energy** (20-hr. rate) ..... 16.85 W-h/lb (37.14 W-h/kg)

**Internal Resistance** (approx.) ..... 14.0 milliohms

**Max Discharge Current** (7 Min.) ..... 39 amperes

**Max Short-Duration Discharge Current** (10 Sec.)..... 130 amperes

**Shelf Life** (% of nominal capacity at 68° F (20° C))

1 Month .....	97%
3 Months.....	91%
6 Months .....	83%

### Operating Temperature Range


Charge.. ..... -4° F (-20° C) to 122° F (50° C)

Discharge..... -40° F (-40° C) to 140° F (60° C)


**Case** ..... ABS Plastic

**Power-Sonic Chargers** ..... PSC-122000A-C


**Discharge Characteristics**

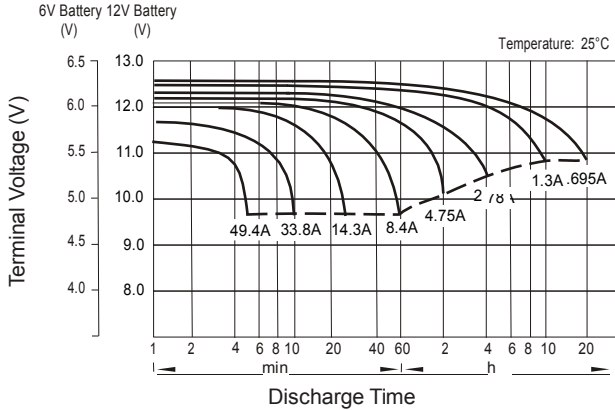


**Charging Characteristics (Cycle Use)**

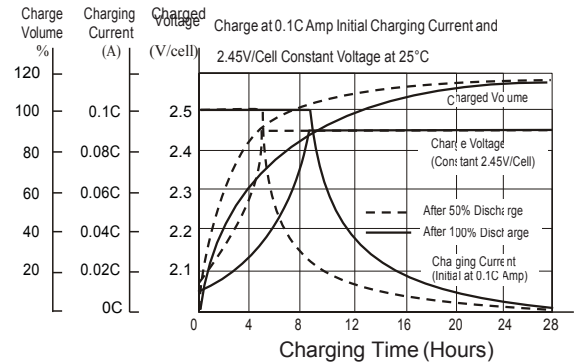

**Cycle Life in Relation to Depth of Discharge**

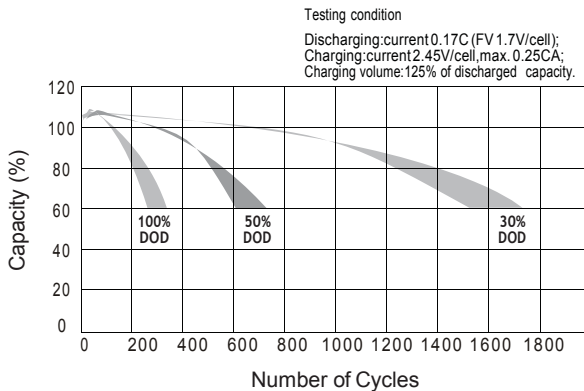

**Temperature Effects in Relation to Battery Capacity**

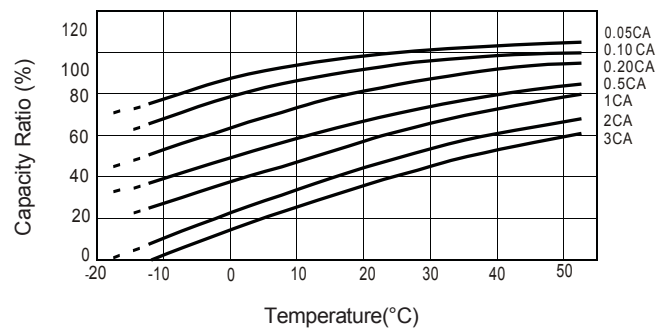

**Charging**

**Cycle Applications:** Limit initial current to 3.9A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 139mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to “float” voltage.


**“Float” or “Stand-By” Service:** Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Chargers**

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for “C-Series Switch Mode Chargers” and “Transformer Type A and F Series”. Please contact our Technical department for advice if you have difficulty in locating suitable models.

**Self Discharge Characteristics**

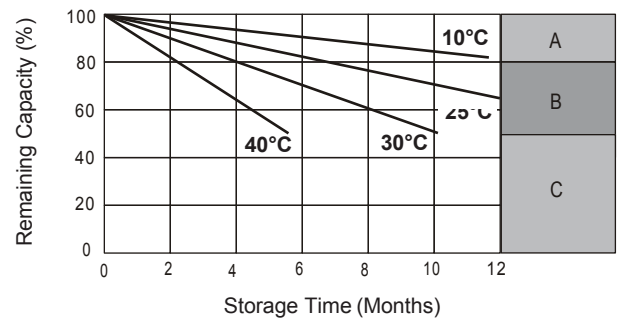

- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:  
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.  
 3. Charged for 8~10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached

**Further Information**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

**Contact Information**

**DOMESTIC SALES**  
 Tel: (08) 9562 3725  
[admin@phbatteries.com.au](mailto:admin@phbatteries.com.au)

[www.powerhousebatteries.com.au](http://www.powerhousebatteries.com.au)  
 1 Unit 1/2 Amesbury  
 Loop Butler WA  
 Perth 6036