

## PS-121400FR 12 Volt 140.0 AH


### Rechargeable Sealed Lead Acid Battery





#### Terminals

(mm)

- T11 - THREADED INSERT - 8mm STUD



#### Physical Dimensions: in (mm)

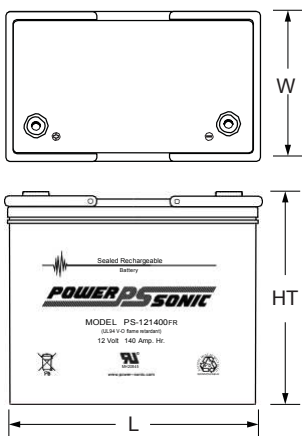

**L:** 13.50 (343) **W:** 6.73 (171) **H:** 10.80 (274) **HT:** 11.15(283)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

#### Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant flame retardant ABS case and cover (UL94 V-0)
- Integrated ABS carrying handles for ease of movement
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

#### Performance Specifications

**Nominal Voltage** ..... 12 volts (6 cells)

#### Nominal Capacity

20-hr. (7A to 10.50 volts) .....	140.0 AH
10-hr. (13.5A to 10.50 volts) .....	135.0 AH
5-hr. (24A to 10.20 volts) .....	120.0 AH
1-hr. (84A to 9.00 volts) .....	84.0 AH
15-min. (260A to 9.00 volts).....	65.0 AH

**Approximate Weight** ..... 99.00 lbs. (44.91 kg)

**Energy Density** (20-hr. rate) ..... 1.71 W-h/in<sup>3</sup> (104.48 W-h/l)

**Specific Energy** (20-hr. rate) ..... 16.97 W-h/lb (37.41 W-h/kg)

**Internal Resistance** (approx.) ..... 3 milliohms

**Max Discharge Current** (7 Min.) ..... 420.0 amperes

**Max Short-Duration Discharge Current** (10 Sec.)..... 950.0 amperes

#### Shelf Life (% of nominal capacity at 68 °F (20 °C))

1 Month .....	97%
3 Months.....	91%
6 Months .....	83%

#### Operating Temperature Range

Charge.. ..... -4 °F (-20 °C) to 122 °F (50 °C)

Discharge.....-40 °F (-40 °C) to 140 °F (60 °C)


**Case** ..... ABS Plastic (UL94 V-0 flame retardant)

**Power-Sonic Chargers** ..... n/a


**Constant Power Discharge Ratings**

MODEL	FINAL VOLTAGE	WATTS PER CELL @ 25° C						
		5 MIN	10 MIN	15 MIN	20 MIN	30 MIN	45 MIN	60 MIN
<b>PS-121400FR</b>	1.75	680	510	432	366	302	220	176
	1.70	720	550	462	376	304	225	180
	1.67	740	560	480	381	306	228	182

**Discharge Time vs. Discharge Current**

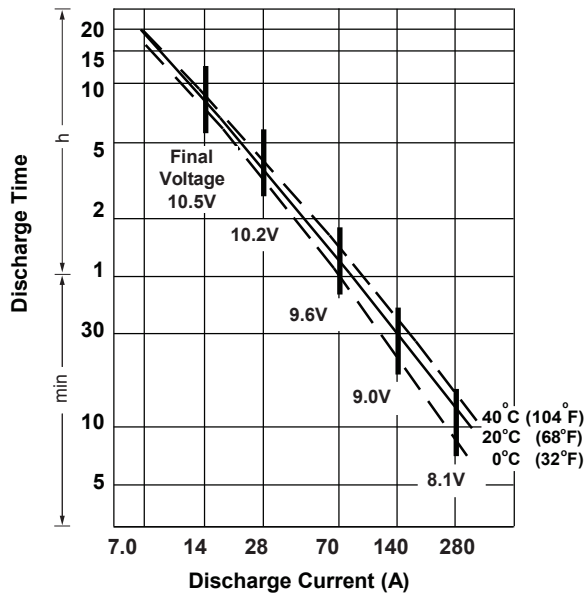

**Discharge Characteristics**

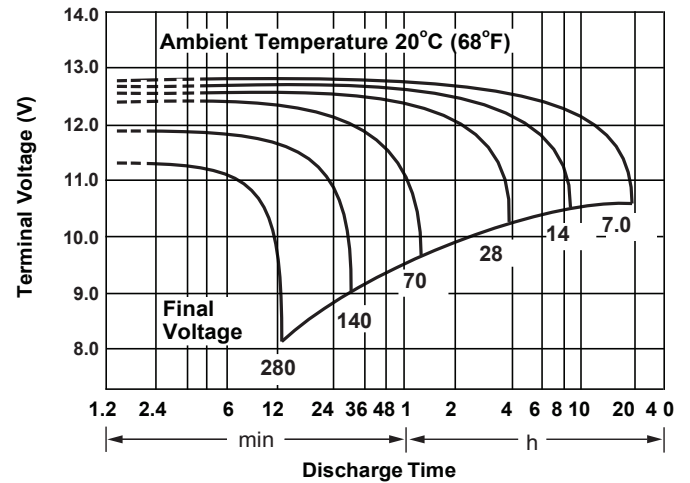


**Charging**

**Cycle Applications:** Limit initial current to 20A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 1.4A. Battery is fully charged under these conditions, and charger should be disconnected or switched to “float” voltage.

**“Float” or “Stand-By” Service:** Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Shelf Life & Storage**

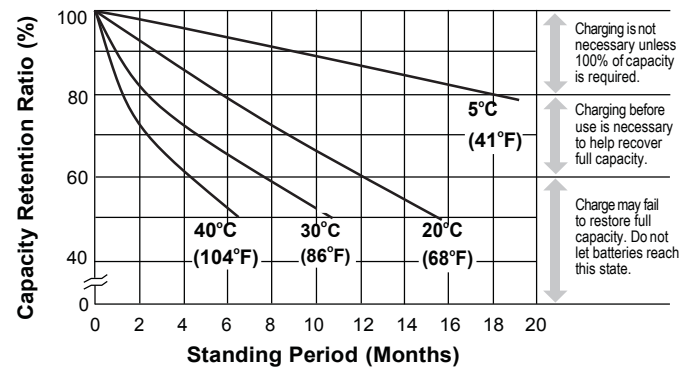

**Chargers**

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for “C-Series Switch Mode Chargers” and “Transformer Type A and F Series”. Please contact our Technical department for advice if you have difficulty in locating suitable models.

**Further Information**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

**Contact Information**



**DOMESTIC SALES**  
Tel: (07) 3386 1102  
Fax: (07) 3102 9913  
[sales@spb.net.au](mailto:sales@spb.net.au)

[www.sealedperformance.com.au](http://www.sealedperformance.com.au)  
1 Ant Road, Yatala  
Brisbane QLD 4207

